iQ3500


GENERAC

iQ SERIES Inverter Generator

1 of 2


Features

- Ultra-Quiet Advanced inverter technology and enclosure design provide optimal quiet performance
- POWERRUSH™ Advanced Technology Delivers over 50% more starting capacity allowing you to do more with less*
- Ideal For Work Or Play Durable steel enclosure, clean inverter power and easy portability make this the ideal generator for jobsites or recreational activities
- Electric Start Hassle free startup (battery included)
- PowerDial™ Choke/Run/Stop three operation settings integrated into one simple-to-use dial
- **True Power™ Technology** provides clean, stable power ideal for sensitive electronics, tools and appliances
- Digital Smart LCD Digital Wattage Meter, Run Time Remaining Display, Generator Status, Hour Meter and Fuel Level
- USB Ports Charge mobile devices including smartphones and tablets
- Economy Mode Reduces noise and fuel consumption
- Parallel Ready Connect two iQ3500 inverter generators for twice the power (Parallel Kit #7668 sold separately)
- * Increases electrical current upon demand; above rated output when starting electric motors.





AC Rated Output Running Watts 3000 AC Maximum Output Starting Watts 3500

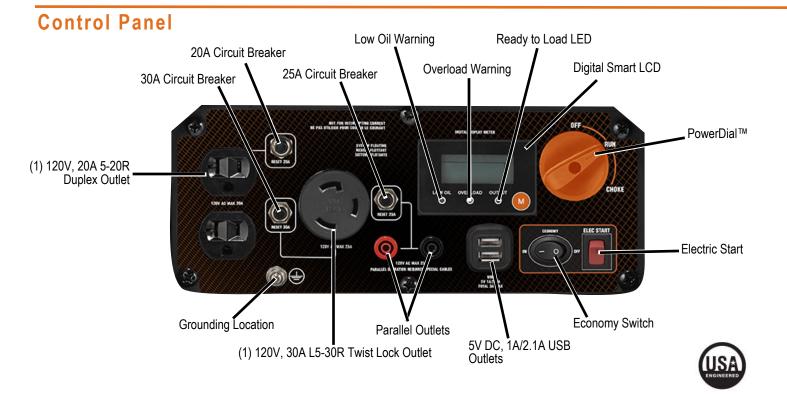

GENERAC

iQ3500

iQ3500

2 of 2

•				4.4	
S	ne	CIT	ICA	110	ns
		••••			


Product Series	iQ3500	
Model Number	7127-0	
Configuration	50 ST/CSA	
AC Rated Output Running Watts	3000	
AC Maximum Output Starting Watts	3500	
Rated AC Voltage	120 VAC	
Rated AC Frequency	60 Hz	
Rated 120 VAC Amperage	25	
Engine Displacement	212cc	
Engine Type	OHV	
Engine RPM	Variable	
Recommended Oil	10W-30 / SAE 30	
Oil Capacity qt (L)	0.6 (0.6)	
Lubrication Method	Splash	
Total Harmonic Distortion	< 3% (safe for sensitive electronics)	
Choke Location	Integrated into PowerDial™	
Fuel Shut Off	Integrated into PowerDial™	
Starting Method	Electric Start / Recoil Pull Start	
Battery Included	Yes	
Battery Type	Lead Acid (12V DC, 6 Ah)	
Battery Part No.	1000038386	
Battery Dimensions	4.5" X 2.8" X 5.2"	


Low Oil Shutdown	Yes	
Neutral Bonded to Ground	No	
Floating Neutral	Yes	
Start Switch Type	PowerDial [™] and Electric Start Switch	
Start Switch Location	On Control Panel	
Fuel Tank Capacity gal (L)	2.6 (10)	
Run Time at 50% of Rated Load (Hours)‡	8.9	
Run Time at 25% of Rated Load (Hours)‡	14.1	
Warranty- Residential	3 Year Limited	
Warranty- Commercial	3 Year Limited	
Included	Engine oil, oil funnel, battery, tool kit and Owner's Manual	

‡ Economy Mode

Dimensions and Weights

iQ3500				
Length in (mm)	23.7 (601)			
Width in (mm)	18 (457.6)			
Height in (mm)	21.7 (552.4)			
Carton Length in (mm)	24.6 (625)			
Carton Width in (mm)	19.9 (505)			
Carton Height in (mm)	22.8 (580)			
Unit Weight lbs (kg)	109.1 (49.5)			
Shipping Weight lbs (kg)	120.2 (54.5)			







Generac Power Systems, Inc. • P.O. Box 8, Waukesha, WI 53187 • generac.com ©2018 Generac Power Systems, Inc. All rights reserved. All specifications are subject to change without notice. Part No. 10000016701-A 08/03/2018